


# Why sputnik24<sup>®</sup>?

- Easy Internet Access **use your own SIM or full package**
- EASY to install – **single wire installation** using just one standard coaxial cable with 75 Ohm-F- or 50 Ohm N-Connectors, no extra cable
- UV stable, IR reflecting Radome
- Radome is sea weather and desert proof
- Light weight **Diversity- and MIMO-Antenna**
- Patented, special design, **optimized for long-range access**
- High Gain and Ultra-wide broadband antenna elements
- **Low power consumption**
- Overvoltage / surge protection available
- Automatic handover from LTE to 3G to 2G upon availability
- Top speed up to 150MBit/s download and up to 50 MBit/s upload (upon availability and network operator)
- Can be connected to existing onboard traffic management and routers easily
- Bonding IPstreams via antennas up to 600 MBit/s
- Up to 200 users can be online at the same time
- Professional product manufactured under high German quality standards

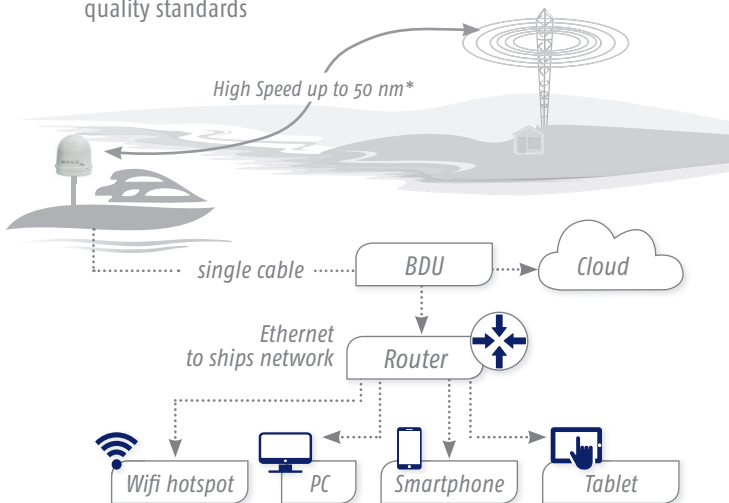

(\* depends on operator)

## CONTACT

Germany  
sputnik24<sup>®</sup> GmbH is located in one of the most modern media centers of Europe – the media city leipzig.

sputnik24<sup>®</sup> Communication Systems GmbH  
Altenburger Strasse 9  
04275 Leipzig / Germany  
Tel: + 49- 341- 2191 0060

info@sputnik24.de  
www.sputnik24.de



# sputnik24<sup>®</sup>

wireless mobile communication  
communication network design  
antenna design  
satcom



## sputnik24® – company profile

sputnik24® Communication Systems GmbH is a young, ambitious German company specialized on all kind of antennas and services for communication in our mobile world.

*We are manufacturer of communication products.*

*We offer services and consultancy for wireless mobile communications.*

*We train on mobile communication, satellite services and network design.*

## PRODUCTS

- Maritime Mobile Antennas for Long Range LTE
- Traffic Management
- Monitoring
- Airtime
- Maritime Satellite Antennas
- Onboard IT-Network and Security Design

## CONSULTING SERVICES

- Antenna Design
- SatCom On The Move (SOTM)
- Satellite Network Design
- RF Consulting

## TRAINING

- SatCom / LTE + Connectivity
- Type Approval Assistance
- Encryption Guidelines
- Data Safety and Privacy Solutions

## sputnik24® – products for 4G / LTE Internet Access

Our new LTE broadband antenna extends the range of mobile Internet connectivity to a new dimension on sea. Affordable high speed Internet is now available for land mobile users and coastal shipping by a professional, rock solid, small, light weight antenna to surf in the net with all your devices like Smartphone, Tablets, PCs and other devices you have on board.

The antenna system provides diversity function for better connectivity and higher speed via LTE networks. Optimization for long-range access will provide excellent connectivity being offshore with high data speed and throughput. The full usability is given by a **one-cable** solution, connecting the antenna device with the control unit.

The antenna offers up to **150 Mbit/s** download and up to **50 Mbit/s** upload speed (upon availability of your provider).

Land mobile and maritime customers get the unique option to use their own SIM cards with no extra costs.

The product is produced under high Quality standards in Germany.



## Specification Maritime Mobile Terminal

SYSTEM TYPE	LTE (4G) ~3G-2G high performance Internet Terminal incl. Antennas, Modem, Router and Firewall
Sub-Systems	Outdoor-Unit (ODU) and Below-Deck-Unit (BDU)
Connection	Single coaxial cable between ODU and IDU

ODU – BASIC MODEL	
Antennas	Diversity plus MIMO Antenna System, Ultra-Wide-Band with RADAR Reflector Frequency range: 0.1 GHz ... 12 GHz
SIM	in ODU
Weight	2.5 kg
Mounting	4 x M8 stainless steel screws (A4)
Radom-Dimension	Diameter 240mm x Height 270mm
Connection to BDU	Single Cable Coax 75 Ohm (RG6) or 50 Ohm LL
Maximum cable length	50 Ohm: up to 300m; 75 Ohm: up to 100m
Power supply	Phantom type, through coaxial cable
Power consumption	5W during operation; 8W peak during power-up
Operational ambient temperature	-45°C ... +60°C
Maximum permanent acceleration load	2g (linear vibration)
Maximum peak acceleration load	25g (single shock)

BDU – BASIC MODEL	
Size	170mm x 125mm x 30mm
Weight	600g
Operational ambient temperature	-25°C ... +45°C
Power consumption	3W during operation; 5W peak during power-up
Connections	Ethernet 100 Base-T (option 1000 Base-T) DC 15 ... 24V F (optional N) connector (cable from ODU) F - Option for loop through USB 2.0 Master Ground connection point to ships GND